

# MAXWATT®

POWER WHEN YOU NEED IT

## PURE SINE WAVE PORTABLE POWER STATION

Powered by



Lithium-Ion Battery



### Features

WIRELESS CHARGING FOR SMART DEVICES




5 STAGE LED LIGHT BAR



PURE POWER  
INCREASE YOUR POWER & RUNNING TIME BY CONNECTING 2 MODELS IN PARALLEL

### Professional BMS Management System

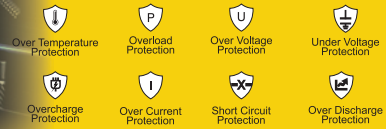


Product Code: MXPRO2600i  
Barcode: 9356905000364

**2600 WATT** SURGE POWER  
**1300 WATT** RATED POWER

Rated Power  
Max Power  
Surge Power

1300 Watt  
1500 Watt  
2600 Watt

1310  
WATT HOURS

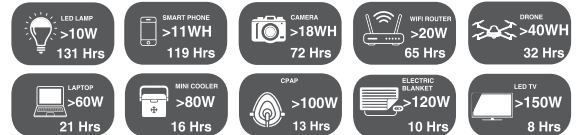

### Specifications:

#### General Info

- Net weight 11.3kg(25lbs).
- Dimension 340×236×215mm(13.4×9.3×8.5inches).
- Rated Power (Watt) 1300
- Max Power (Watt) 1500
- Surge Power (Watt) 2600
- Battery Capacity (Wh) 1310
- AC Current 240V
- Warranty This unit carries a 24-month warranty.

#### Output Ports

- Wireless Charging 15W (DC 5521 Output (x2): 13.6V~5A, total 8A.
- Car Outlet Output (DC 5521 Output (2)+ car port output: 13.6V~8A max.)
- USB-A Output x 2 5V~2.1A, Total 10.5W.
- Fast Charge Output x 2 5V~2.5A, 9V~2A, 12V~2A(24W max.)
- USB-C 65W Output x 2 5V/9V/12V/15V/20V~3.2A(65W max.) Total 130W.
- AC Output x 2 Pure Sine Wave Power 240V~ 50Hz, total 1300W.

#### Input Ports

- PV Input 18V-25V~20A max.
- AC Input x 2 48V 4A-192W max, total 384W.
- Car Charger Input 12V, 100W max.

#### Battery Info

- Powered By LG CHEM.
- Cell \*NCM
- Battery Capacity (Wh) 1310 Watt Hour
- Battery Cycle Life >1000 times, remaining capacity>80%.
- BMS Protections High Temperature Protection.

- Running Time of this Unit The continuous running time of this unit at a 100% load is approximately 1 hour, whilst at a 50% load the running time is approximately 2 hours. This is dependent on the State of Charge (SOC) and the State of Health (SOH) of the batteries. Please note that this is only a guideline.

#### Operating Temperature

- Discharging Temperature -10 to 40°Celsius
- Charging Temperature 0 to 40°Celsius

#### Solar Panel Info:

Model	Capacity	Charging	Solar Panel	Recommend	Time
MXPRO2600i	1310 Wh	400W	100W	x	/
			200W	√	10~11Hrs
			200W+100W	√	7~7.5Hrs
			200W+200W	√	5~6Hrs

The data is only the theoretical time; the actual data will vary according to the current light intensity and placement position.

